


Zanovello

hinges for domestic and professional appliances

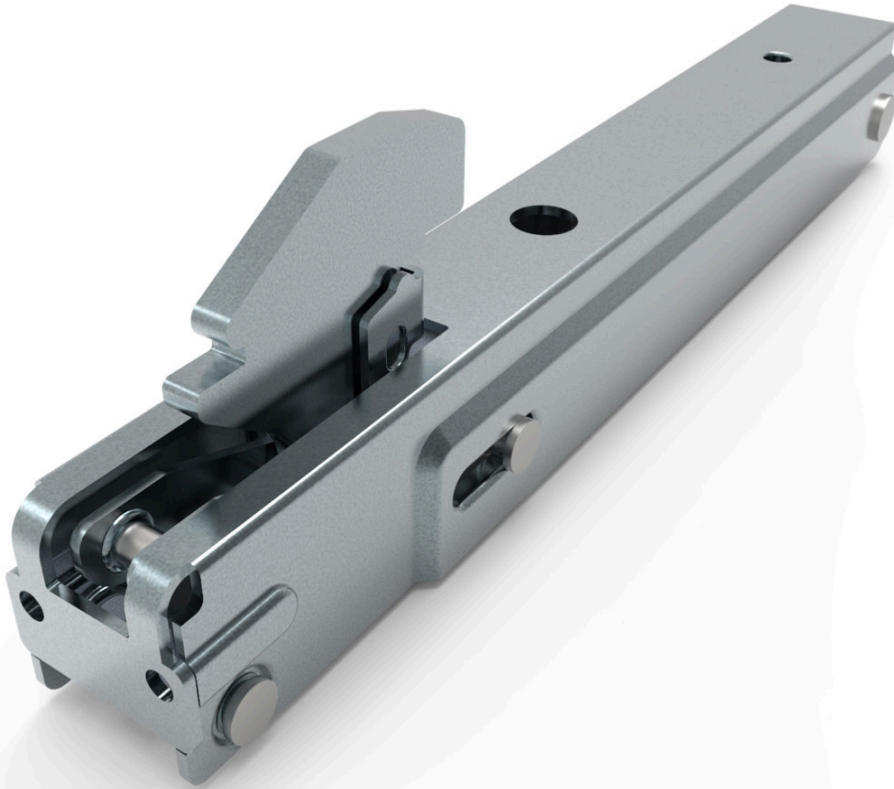

FUTURA


Revolutionary standard

An innovative model, which is now a global reference: solid, with a rational design and small footprint.

Technical Information

Hot	✓	Fastening points	top, side, front
Cold	✓	Position on the door	✓
Wash	✗	Position underneath the oven	✓
Static load (Kg)	UNI	Flap opening	85°
Door range from - to (Kg)	2 -15	Temperature range	< 250°
Opening - closing cycles	20.000	Grill position	15°
Opening mechanical stopper	✗		

Technical design

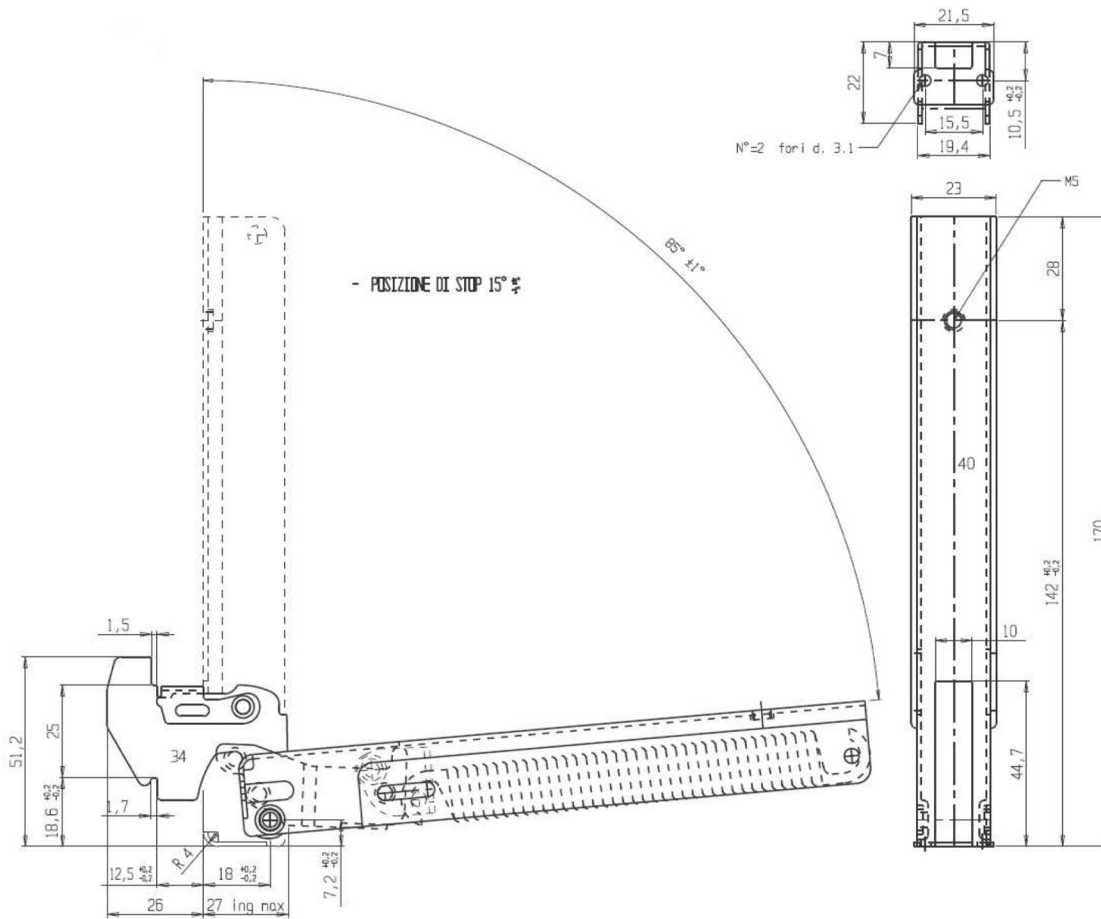

Personalizations

<u>Professional</u>	<u>Stainless steel arm</u>
<u>Vertical displacement</u>	<u>Delta front door holder 8-28,5mm</u>
<u>Pyrolytic (450° in the muffle)</u>	<u>Opening force 30-60N</u>
<u>Under muffle position</u>	<u>Identification code marking on the casing</u>
<u>Chrome-plated hook, clevis</u>	