

hinges for domestic and professional appliances



FUTURA SOFT


Always at the avant-garde


The quality of the Futura hinge, with a controlled and modular closure.

Technical Information

Hot	_	Fastening points	top, side, front
Cold	✓	Position on the door	-
Wash	×	Under muffle position	-
Static load	UNI	Flap opening	86°
Door range from - to (Kg)	0 -14	Temperature range	< 120°
Opening - closing cycles	15.000		
Opening mechanical stopper	✓		

Technical design

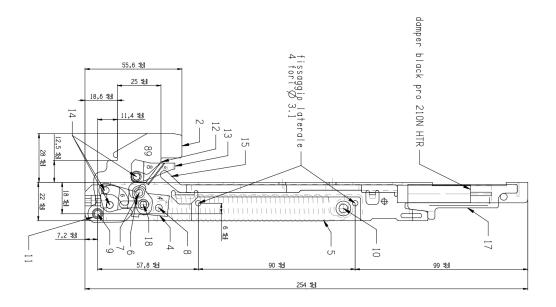

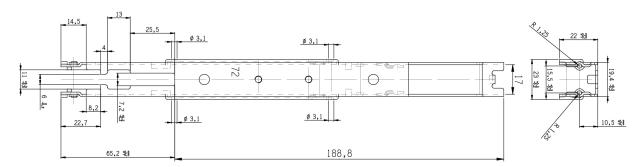

Personalizations

Without soft effect

Pyrolytic (450° in the muffle)

Delta front door holder 12,5-15mm