

hinges for domestic and professional appliances



SLIM


Aesthetics and functionality

A slim, solid and sturdy door hinge which can combine its small size with soft closing performance.

Technical Information

Hot		Position	Under muffle
Cold		Fastening points	side
Wash		Flap opening	82°
Static load (Kg)	35	Temperature range	< 250°
Opening - closing cycles	20.000	Opening mechanical stopper	
Door range from - to (Kg)	2 - 14		

Technical design

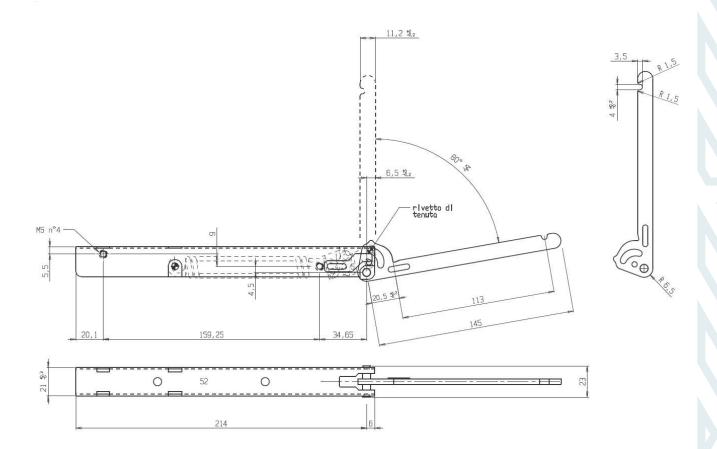

Personalizations

Soft closing

Pyrolytic (450° in the muffle)

In stainless steel for washing