

hinges for domestic and professional appliances



FIXED PIVOT HINGES WITH SETTING MECHANISM


Swift and solid

A simple, versatile, reliable and long-lasting model suitable for a wide variety of products. Its ergonomic design simplifies assembly and maintenance.

Technical Information

| Hot | <u> </u> | Fastening points | top, front |
|---------------------------|-----------|-------------------|----------------|
| Cold | | Fastening flap | dx, sx, bilat. |
| Wash | × | Grill position | 20 ° |
| Door range from - to (Kg) | 2 -16 | Temperature range | < 250° |
| Opening - closing cycles | 20.000 | Static load | UNI |
| Flap opening | 84° - 85° | | |

Technical design

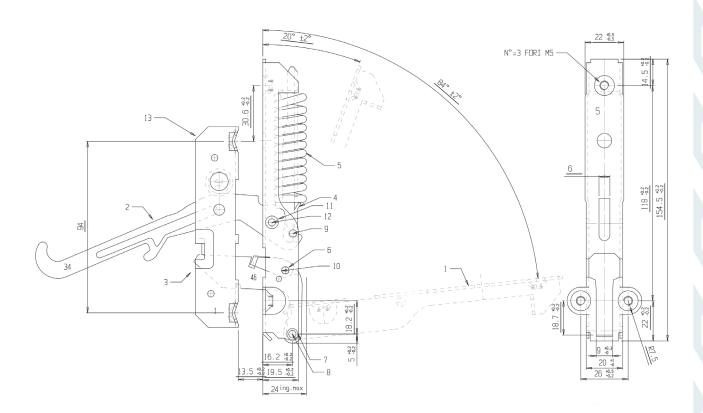

Personalizations

Delta front door holder 8-16mm

Professional

Pyrolytic 450° in the muffle

Various accessories

Opening force 30-60N