

SOFT CLOSING


Patented fluidity

The only one on the market providing smooth, modular, and long-lasting closure performance from any opening angle.

Technical Information

Hot		Fastening points	top, side, front
Cold		Position on the door	<u> </u>
Wash	X	Under muffle position	<u> </u>
Static load (Kg)	UNI	Flap opening	86°
Door range from - to (Kg)	3 -14	Temperature range	< 120°
Opening - closing cycles	15.000	Opening mechanical stopper	✓

Technical design

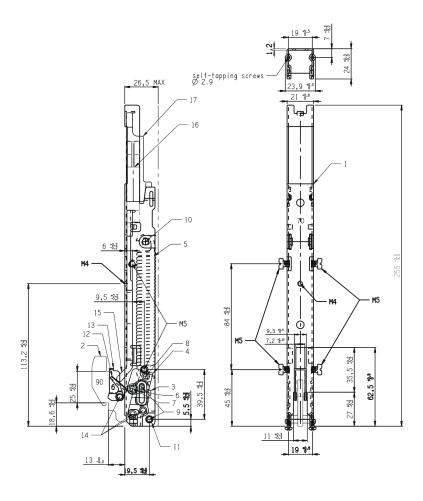

Personalizations

Without soft effect Delta f	front door holder 13-15 mm
-----------------------------	----------------------------

Right-left opening Pyrolytic (450° in the muffle)

For cover Identification code marking on the casing